

HEAVY DUTY

ELETTRICO / ELECTRIC

WSF 4000 - 4050 - 5000 - 6000


MAX 150°


ACCESSORI STANDARD STANDARD ACCESSORIES



920mm

Lancia con pistola automatica da 920 mm.
920 mm. lance with automatic trigger gun

 Tubo alta pressione da 10 metri
10 meters high pressure hose

Dimensioni tubo / Hose dimensions

R2 5/16

WSF4000

R2 3/8

WSF4050

WSF5000

WSF6000

CARATTERISTICHE FEATURES



TST
TOTAL STOP



SBS
STAND-BY STOP



WATER LEAK



DSS
DROP STOP SYSTEM



SWL
SECURITY WATER LEVEL



IMBALLAGGIO / PACKAGING



150x85x115 cm



240 kg

CARATTERISTICHE / FEATURES


Modello Model	Portata Flow Rate lt/min	Pressione / Pressure	Pompa / Pump	Potenza / Power		Tensione Voltage Volts	Frequenza Frequency Hertz	Fase Phase	Uscita Outlet °C Max	Codice Code
		Bar	rpm	HP	kW					
WSF4000	15	200	1450	7.5	5.5	400 V	50	3	150°	3.023.24.333
WSF4050	21	150	1450	7.5	5.5	400 V	50	3	150°	3.023.24.334
WSF5000	21	200	1450	10	7.5	400 V	50	3	150°	3.023.24.335
WSF6000	30	200	1450	15	11	400 V	50	3	150°	3.023.24.364

Disponibile anche a 60Hz / Available at 60Hz

HEAVY DUTY

ELETRICO / ELECTRIC

WSF 4000 - 4050 - 5000 - 6000

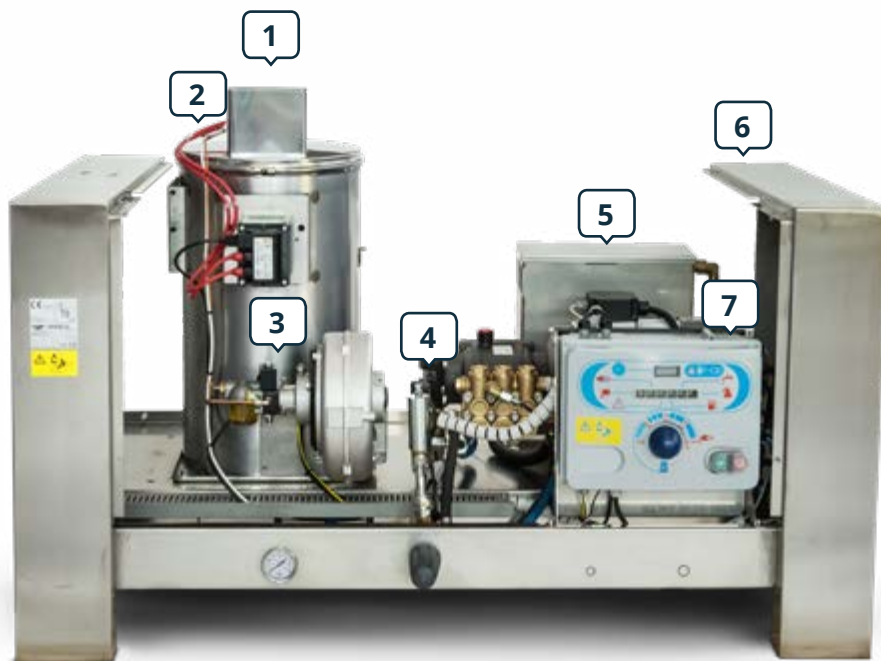

MOTORE / ENGINE



Motore elettrico MAZZONI senza manutenzione asincrono monofase serie MEC, con termiche sugli avvolgimenti. MAZZONI MEC series maintenance-free electric induction motor with thermic protection on the windings

Giunto elastico
Elastic coupling

POMPA / PUMP



Pompa professionale in linea (a bielle) con testata in ottone e tre pistoni in ceramica. In line professional pump (with connecting rods), brass head, and three ceramic pistons.

CARATTERISTICHE TECNICHE / TECHNICAL FEATURES

- 1 Caldaia INOX con serpentina in tubo d'acciaio e arresto bruciatore in caso di mancanza acqua
- 2 Controllo fiamma
- 3 Pompa gasolio anti grippaggio
- 4 Valvola di sicurezza per le sovrappressioni
- 5 Vasca acqua da 10 litri con controllo livello
- 6 Telaio in acciaio INOX
- 7 Pannello di controllo
- ✓ Valvola by-pass automatica con regolazione della pressione
- ✓ Sicurezza mancanza acqua
- ✓ Display contaore
- ✓ Accumulatore per vibrazioni

Stainless steel heater with steel pipe coil and burner safety device
In case of lack of water
Flame control
Anti-seizure diesel pump
Safety valve for overpressure
10 litre water tank with floater water level
Stainless steel chassis
Control panel
Automatic by-pass valve with pressure regulation
Water safety device
Hour counter display
Dampner

ACCESSORI OPZIONALI / OPTIONAL ACCESSORIES ● 4000 ● 4050 ● 5000 ● 6000



9.039.04.001 ● ● ●
Comando a distanza / Remote control



3.037.02.007 ● ● ● ●
Prolunga antivento / Wind protection



1.075.04.007 ● ● ● ●
Pannello posteriore / Rear panel



3.056.04.002 ● ● ● ●
Vasca anticalcare / Antiscale tank



3.056.04.001 ● ● ●
Serbatoio gasolio con galleggiante
Fuel tank with level switch



3.003.34.002 ● ● ● ●
Kit erogazione esterna detergente
External detergent kit



3.037.02.002 ● ● ● ●
Prolunga camino
Chimney extension



9.00.9521 + 9.00.9768 9.00.9021 + 9.00.9765
Avvolgitubo murale in acciaio verniciato oppure INOX
Painted steel or stainless steel wall-mounted hose reel

